



● Features & Application

- ◆ Quick & Reliable action, high precision, long life
- ◆ Different contact material like gold alloy, silver alloy or silver for different electrical load application
- ◆ Variety of quick connect terminals, for customer flexibly selection.
- ◆ Variety of auxiliary driving type to meet different occasions.
- ◆ Applicable to the control circuit with AC 380V, DC 250V, used as parts for master electrical appliances or alternative appliances. contact form: Za, it is recommended to connect in the same phase circuit while using the change-over contact.
- ◆ This product is widely used for controlling electromagnet or inductive load, such as home appliance, machine tool, power electronic and automation application.

● code instruction

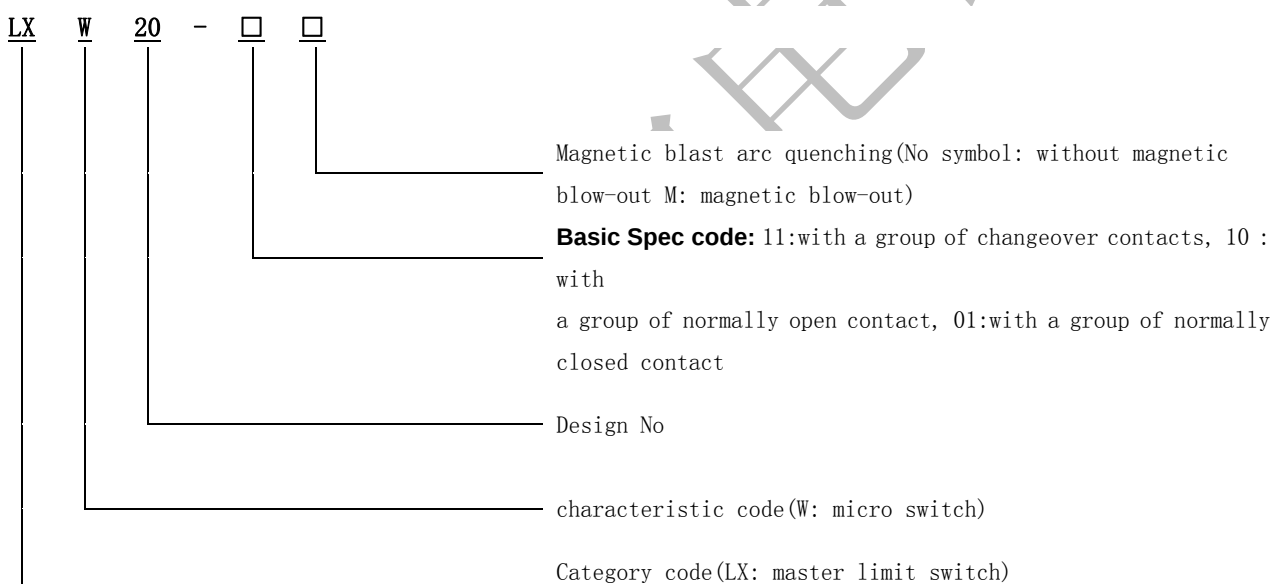



Technical Specification

item	characteristics				
Utilization Category	AC-12	AC-15	DC-12	DC-13	
Ui	380V				
Ith	16A				
Ue	380V	400V	250V	220V	48V
Ie	16A	3A	5A	1. 2A	6A
contact resistance	≤30mΩ				
power frequency withstand voltage	between current-carrying components and surface easy to touch		AC1890V±3% 45~65Hz 5s		
	Between current-carrying metal parts and the ground		AC1890V±3% 45~65Hz 5s		
mechanical life	≥300, 000operations				
electrical life	≥100, 000operations				
Ambient operating temperature	-25℃~85℃				
IP level	IP00				

Approved standards

	CCC	CE
LXW20-□	Ith:16A AC-12 380V 16A AC-15 400V 3A	/
LXW20-□M	Ith:16A AC-12 380V 16A AC-15 240V 1A DC-12 250V 5A DC-13 220V 1.2A	Ith:16A AC-15 240V 1A DC-13 220V 1.2A DC-13 48V 6A

订购电话: 021-59585666 传真: 021-69968999 邮箱: webmaster@shfeili.com 网址: www.shfeili.com QQ: 2660186152


订购事项: 本选型手册所记载的各项产品设计规格参数仅供选型时参考, 由于各种原因可能会未经通知进行变更, 购买时请即时联络客户经理, 获取针对具体型号发布的最新技术规格作为唯一的设计依据



	DC-13 48V 6A	
--	--------------	--



★For more parameters, please contact our account

manager





● contact form



◆ 11 changeover



◆ 10 型 normally open




◆ 01 型 (normally closed)



● terminal


◆ AMP250 (6.3×0.8)




★ For more terminal types, please contact our account manager



● Dimensions and operating Characteristics

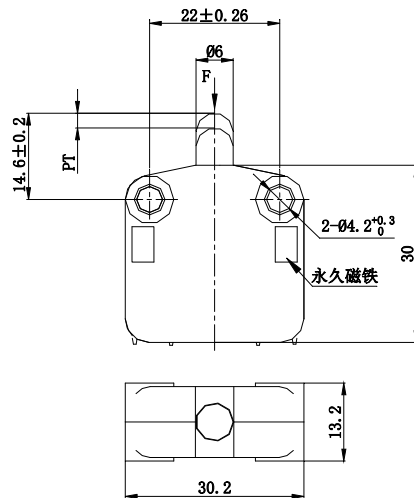


Type	
Operating characteristics	LXW20-□M
OF: (N)	1~4
RF: (N)	0.8~1.6
PT: (mm)	2.5±1
MD: (mm)	0.8~1.6
OT: (mm)	3~5

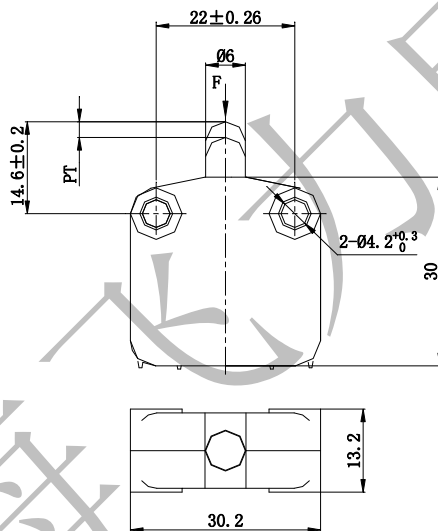

type	
operating characteristics	LXW20-□
OF: (N)	1~4
RF: (N)	0.8~1.6
PT: (mm)	2.5±1
MD: (mm)	0.8~1.6
OT: (mm)	3~5

★ For more specifications, please contact our account manager



●Precautions for correct use

Please read this page carefully before use, common precaution please refer to relevant pages in summary

◆Mounting

Use M4 mounting screws with plane washers or spring washers. To securely mount the Switch. Tighten the screws to a torque of 0.8 to 1.2 N·m

◆insulation distance

Minimum insulating layer thickness for this micro switch is 1.1mm. Minimum space distance is 1.9mm between terminal and mounting plate. Please use insulating shields or partition to keep safe insulating distance if it failed to secure insulating distance required.