


KST-L 型可曲挠双球体橡胶接头

KST-L double spheroid flexroidflexible rubber joint

材料表 Table of Materials

技术条件 Technical Consition

序号 Serial No	部位 Prtion	材料 Material	工作压力 Mpa (kg. f/cm ²) Workngpressnre	1. 0Mpa (10kg. f/cm ²)	偏转角度 deflectangle	(a1+a2) 45℃
1	主体 Main body	极性橡胶 polarized rubber	爆破压力 MPa (kg. f/cm ²) Working pressure	3. 0Mpa (30kg. f/cm ²)	真空度 Vacuum	53KPa (400mmHg)
2	内衬 Lining	尼龙帘布 Nylon cord fabric	适用温度 Applicable temp. ℃	-20~80℃		
3	骨架 Frame	尼龙帘布 Nylon cord fabric	适用介质 Applicable media	空气、压缩空气、水、海水、热水、弱酸 Air.Compressed air. Water.Sea Water. Hot Water. Weak acid.Etc		
4	活接头 Flexible joint	铸钢 Mild steer	注: +80℃-135℃采用特殊配方			

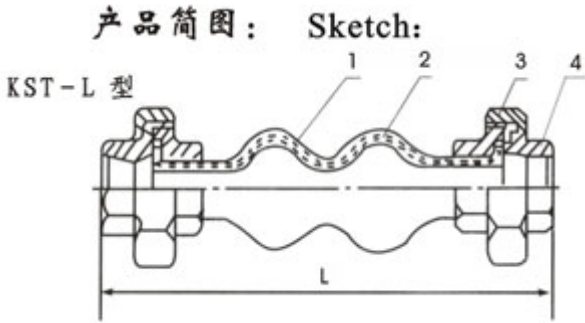

Note: +80℃-135℃ use special formula

管子公称通径和轴向位移横向位移表

Table of nominal diameter of pipe and displacement ofaxial and lateral


(安装时活接头中套必须压紧, 以防软接头滑落) (Middle pipe of flexible rubber joint must be impacted tightly in order to avoid the joint slidingon installation)

公称能径 Nominal core diameter		L 值 (mm) LValue		轴向位移 Axialdisplacenment (mm)		横向位移 Axial displacenment (mm)
(mm)	(寸 in)			伸长 Strech (mm)	压缩 Compression	
KST-15	1/2	200		5-6	22	22
KST-20	3/4	180	200	5-6	22	22
KST-25	1	180	200	5-6	22	22
KST-32	1 1/4	200	200	5-6	22	22
KST-40	1 1/2	210	200	5-6	22	22
KST-50	2	220	210	5-6	22	22

KST-65	21/2	245	220	5-6	22	22
KST-80	3	220		5-6	22	22

风机盘管连接件系列 Fan engine coiled pipes joint series

风机盘管连接件有不锈钢波纹 Fan engine coiled pipes joint may be made of stainless steel corrugated管、紫铜波纹管和橡胶高压软管与钢pipe,red steel pipe and rubber soft pipe bearing high pressure burked of制管路连接件扣压或链接而成。具有connected with steel or copper pipe.It has the feature of bearing high耐高压、弹性好、偏转位移量大、耐pressure,good flexible,large deviated displacement ,anti-aging ,anti-老化、耐温、安装方便，选择性好。temperature and good selectivity.It is applied to flexible connective inlet适用于宾馆、饭店、办公楼、实验楼and outlet pipe of fan engine coiled pipes in hotel,restarrant, office等各种风机盘管的进出口管路柔性连building and lab building.接。

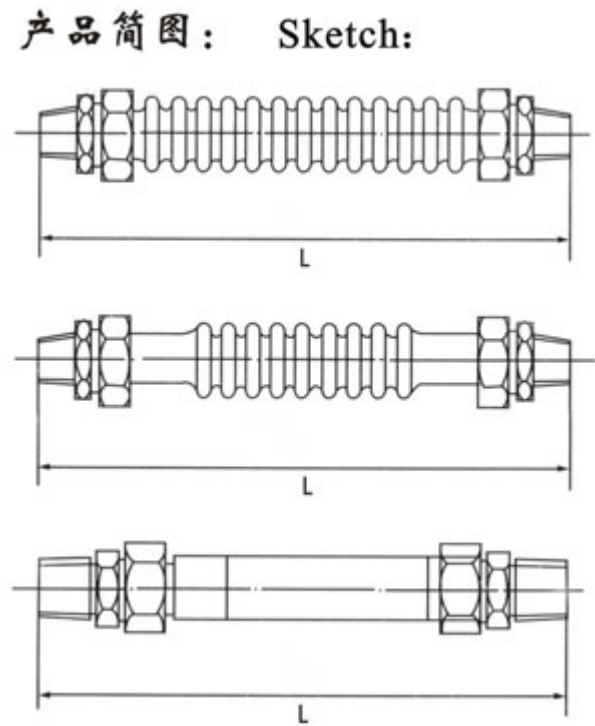

技术特性和基本尺寸

Technology characteristic and basic dimension

公称通径 nominal diameter	总长 L total length	轴向位移 axial disp lacement	轴向伸长 axial stretch	横向位移 lateral displacement	偏转角度 deflect angle	材料 Materials
15	250	10	15	25	60 ⁰	不锈钢

20	250	15	25	30	60 ⁰	stainless steel
25	250	20	30	35	60 ⁰	
15	250	10	15	20	50 ⁰	紫铜 red copper
20	250	10	15	20	50 ⁰	
25	250	10	20	30	50 ⁰	
15	250	15	10	30	45 ⁰	橡胶管 rubber pipe
20	250	15	10	30	45 ⁰	
25	250	15	10	30	45 ⁰	