


## LQT 型金属弹簧隔振器(冷却塔专用)

### LQT metal spring vibration obsorber(for cooling tower)


LQT 型金属弹簧隔振器是由钢板焊接与金属弹簧组合而成，具有低频性和高稳定性，分两组弹簧、四组弹簧和八组弹簧。适用于大型的空调机组，尤其适用于冷却塔。

LQT metal spring vibration absorber(for cooling tower)is composed of Jointing steel plate and metal springs, has low frequency and high stability, can be divided into two group of springs and four group of springs It can be applied to large--scale air--conditioning engine, especially to cooling tower.


LQT-2型（两组）简图：  
Two group of springs:

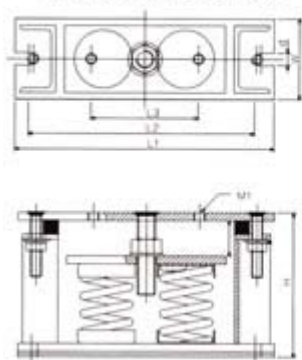

LQT-4型（四组）简图：  
Four group of springs:

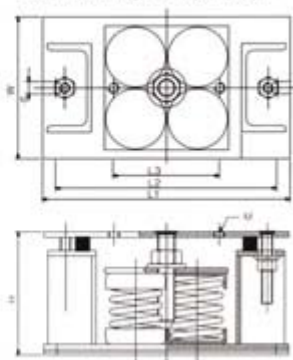

LQT-8型（八组）阻尼限位式简图：  
LQT-8(eight group of spring)damp restriction

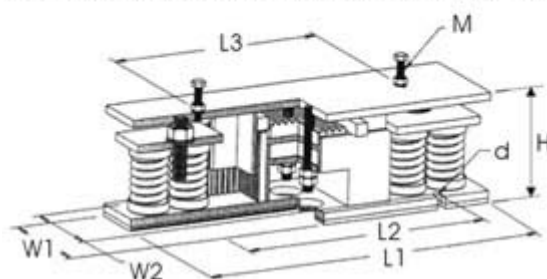

LQT — 2 型技术特性表: Technological characteristic table:

型号 Type	最大承载 (kg) maximum load	变形 (mm) Distortion	H	W	L1	L2	L3	d	M1
LQT-2-300	300	28	165	95	300	265	120	14	M12
LQT-2-450	450	28	165	95	300	265	120	14	M12
LQT-2-600	600	28	165	95	300	265	120	14	M12
LQT-2-800	800	28	165	95	300	265	120	14	M12
LQT-2-1000	1000	28	190	95	300	265	120	18	M16
LQT-2-1200	1200	28	190	95	300	265	120	18	M16
LQT-2-1500	1500	28	190	95	300	265	120	18	M16
LQT-2-1800	1800	28	190	95	300	265	120	18	M16
LQT-2-2000	2000	28	190	95	300	265	120	18	M16

LQT — 4 型技术特性表: Technological characteristictable:

型号 Type	最大承载 (kg) maximum load	变形 (mm) Distortion	H	W	L1	L2	L3	d	M1
LQT-4-400	400	28	140	160	280	250	120	14	M12

LQT-4-600	600	28	160	160	280	250	120	14	M12
LQT-4-800	800	28	160	160	280	250	120	14	M12
LQT-4-1200	1200	28	160	160	280	250	120	14	M12
LQT-4-2000	2000	28	200	200	300	265	120	18	M16
LQT-4-3000	3000	28	200	200	300	265	120	18	M16
LQT-4-4000	4000	28	200	200	300	265	120	22	M16
LQT-4-6000	6000	28	200	200	300	265	120	22	M16

LQT 一 8 型技术特性表: Technological characteristictable:

型号 Type	最大承载 (kg) maxximum load	变形 (mm) Distortion	H	W1	W2	L1	L2	L3	M	d
LQT-8-800	800	25	186	180	150	590	420	380	M16	Φ 14
LQT-8-1600	1600	25	186	180	150	590	420	380	M16	Φ 14
LQT-8-4000	4000	25	234	220	180	670	460	380	M20	Φ 22
LQT-8-8000	8000	25	234	220	180	670	460	380	M20	Φ 22
LQT-8-13500	13500	25	262	350	280	890	660	450	M24	Φ 25
LQT-8-18000	18000	25	262	350	280	890	660	450	M24	Φ 25

注：本厂还定制生产挠度(变形量)1 吋、2 吋、3 吋、4 吋，即 25mm、50mm、75mm、100mm 及以上产品。

Note: We also custom products, the deflection(defolmation) of which is 1, 2, 3, 4 inches, namely 25, 50, 75, 100 mm or above.