


# SY-M30W

## High Efficiency, High Quality PV Module

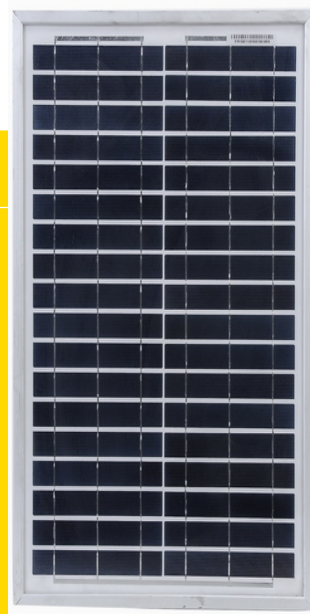

Electrical Characteristics	SY-M30W
Maximum power (Pmax)	30W
Voltage at Pmax (Vmp)	18.3V
Current at Pmax (Imp)	1.64A
Open-circuit voltage (Voc)	23.2V
Short-circuit current (Isc)	1.71A
Temperature coefficient of Voc	$-(0.40 \pm 0.05)\% / ^\circ\text{C}$
Temperature coefficient of Isc	$(0.065 \pm 0.01)\% / ^\circ\text{C}$
Temperature coefficient of power	$-(0.5 \pm 0.05)\% / ^\circ\text{C}$
NOCT (Air 20°C; Sun 0.8kW/m <sup>2</sup> wind 1m/s)	47±2°C
Operating temperature	-40°C to 85°C
Maximum system voltage	600V DC
Power tolerance	+ 3%
Cells	multicrystalline silicon solar cell
No. of cells and connections	36(2X18)
Module Dimension	650mm[25.59in.]x350mm[13.78in.]x25mm[0.98in.]
Weight	2.6kg[5.72lbs]

\* STC: Irradiance 1000W/m<sup>2</sup>, AM1.5 spectrum, module temperature 25°C

\* Specifications are subject to change without notice at any time.



### Key Features:

- High module efficiency and stable power output
- Based on leading process technology
- Outstanding electrical performance under high temperature conditions or low irradiance conditions
- Easy of installation and all-weather applications
- 5 years product warranty(materials and workmanship)
- 20 years module power output warranty
- Peak power of single module is guaranteed in +3% power tolerance
- Strong framed module, passing loaded test of 5400 Pa (IEC61215 2nd)
- The manufacture is certified for ISO 9001:2008


### Product's Guarantee

- 5 years products life warranty
- 15 years module power output no less 90%
- 20 years module power output no less 80%


### Applications

- Off grid residential roof-tops
- Off grid commercial/industrial roof-tops
- Rural area applications
- Solar power system
- Other off-grid applications


### Module Diagram

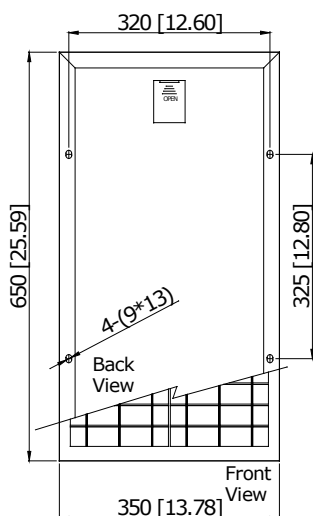

Dimensions in brackets are in inches.  
Un-bracketed dimensions are in millimeters.  
Unit:mm[in.]




Junction Box  
Top View (Lid open)




Section A-A

### I-V Curves

I-V Curves of PV module SY-M30W

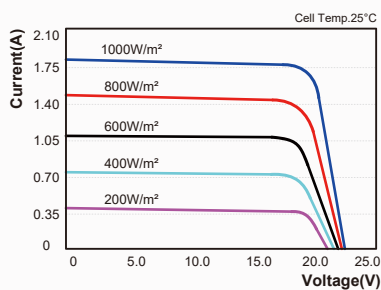

I-V Curves of PV module SY-M30W at various cell temperatures

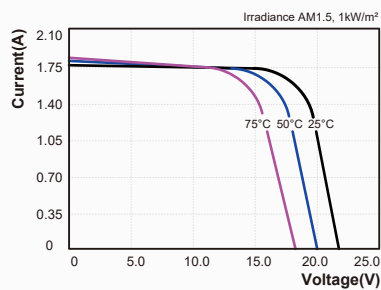

# SUNYO®

SUNYOOO Solar Technology

Address: No.102 Dongdu West Road, Luoyang Town  
Changzhou City, Jiangsu Province, 213104, P.R. China

Tel: 86-519-88790861  
86-519-88791962

Fax: 86-519-88792861

E-mail: sales@sunyooo.com

Website: www.sunyooo.com