



●Features & Application

- ◆Quick & Reliable action, high precision, long life
- ◆Different contact material like silver alloy or silver for different electrical load application
- ◆Variety of auxiliary actuating type to meet different occasions.
- ◆Applicable to the control circuit or auxiliary circuit with AC 380V, DC 250V, More technical characteristics will be shown as in the table below.
- ◆This product is widely used for home appliance, machine tool, power electronic and automation application.
- ◆Contact form: Za, it is recommended to connect in the same phase circuit while using the change-over contact.

●代号说明

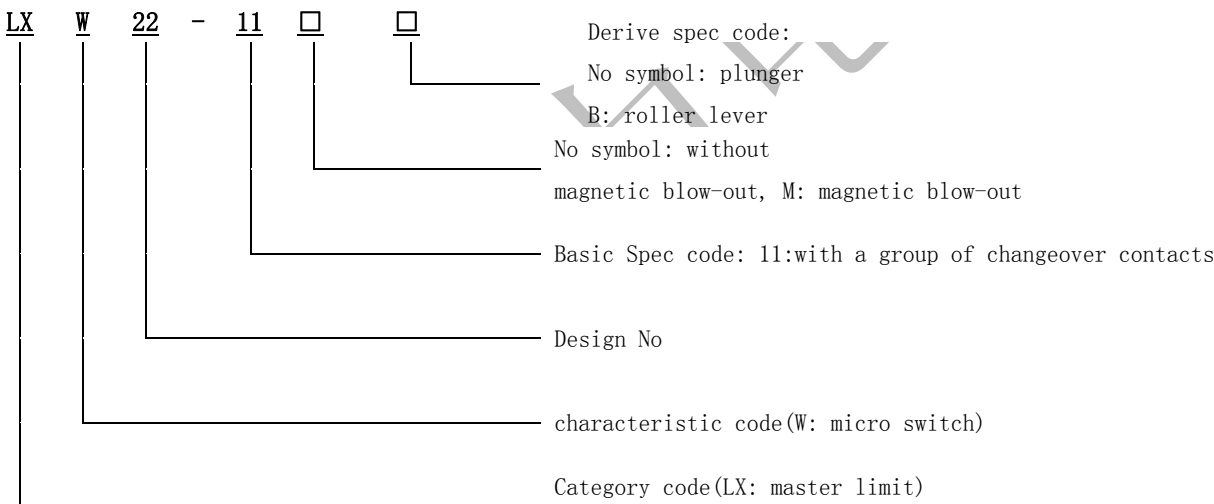



● Technical Specification

Item	Characteristic	
Ui	400V	
Ith	22A	
Contact resistance	$\leq 30\text{m}\Omega$	
Power frequency withstand voltage	Between current-carrying components and surface easy to touch	AC1890V $\pm 3\%$ 45~65Hz 5s
	Between current-carrying metal parts and the ground	AC1890V $\pm 3\%$ 45~65Hz 5s
Mechanical life	$\geq 1,000,000$ operations	
Electrical life	AC-12 >50,000; DC-12 >50,000; AC-15 >30,000; DC-13 >30,000	
Ambient operating temperature	$-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$	

● Approved standards



	CCC、CE
LXW22-11□	AC-12 400V 22A
	AC-15 400V 2A 、230V 3A
	DC-13 250V 0.5A 、110V 1A
	DC-12 250V 1A
LXW22-11M□	DC-12 250V 5A
	AC-12 250V 16A

★ For more parameters, please contact our account manager

● Wiring symbol


订购电话: 021-59585666 传真: 021-69968999 邮箱: webmaster@shfeili.com 网址: www.shfeili.com QQ: 2660186152

订购事项: 本选型手册所记载的各项产品设计规格参数仅供选型时参考, 由于各种原因可能会未经通知进行变更, 购买时请即时联络客户经理, 获取针对具体型号发布的最新技术规格作为唯一的设计依据

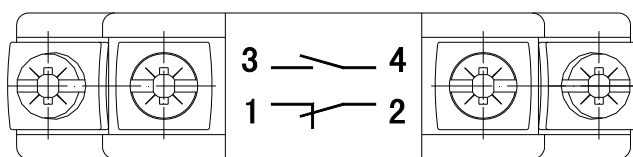



● Wiring type

- ◆ screw thread terminal: M3 bolt
- ◆ AMP 250 (6.3*0.8) quick connect terminal: AMP 250 (6.3*0.8)

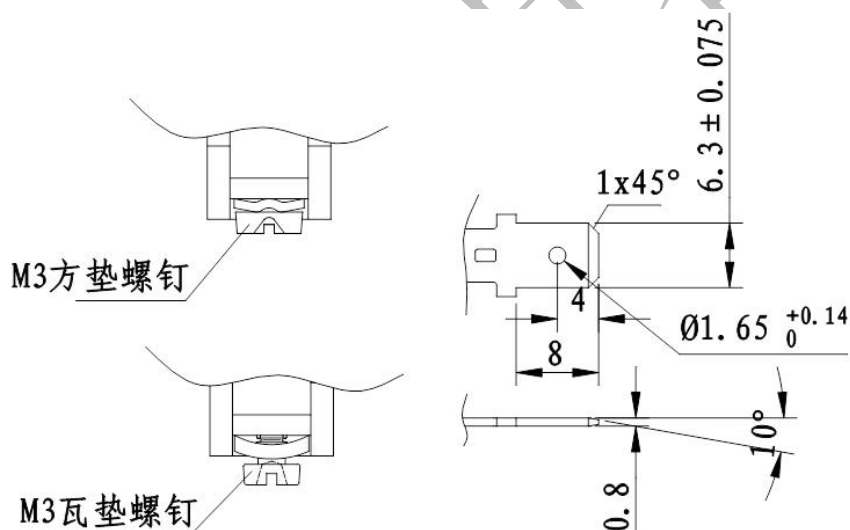



● Actuating type

Plunger:

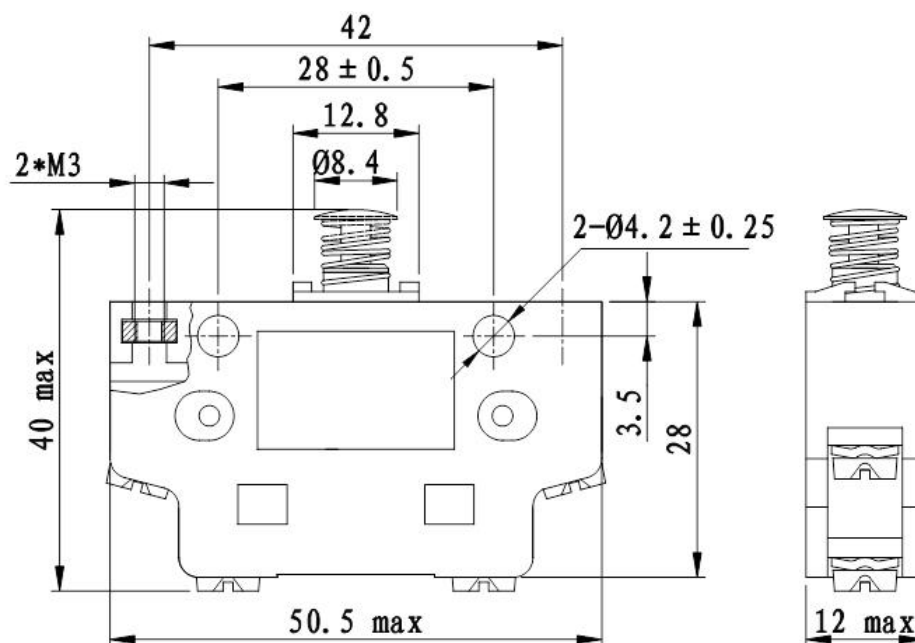


roller lever:

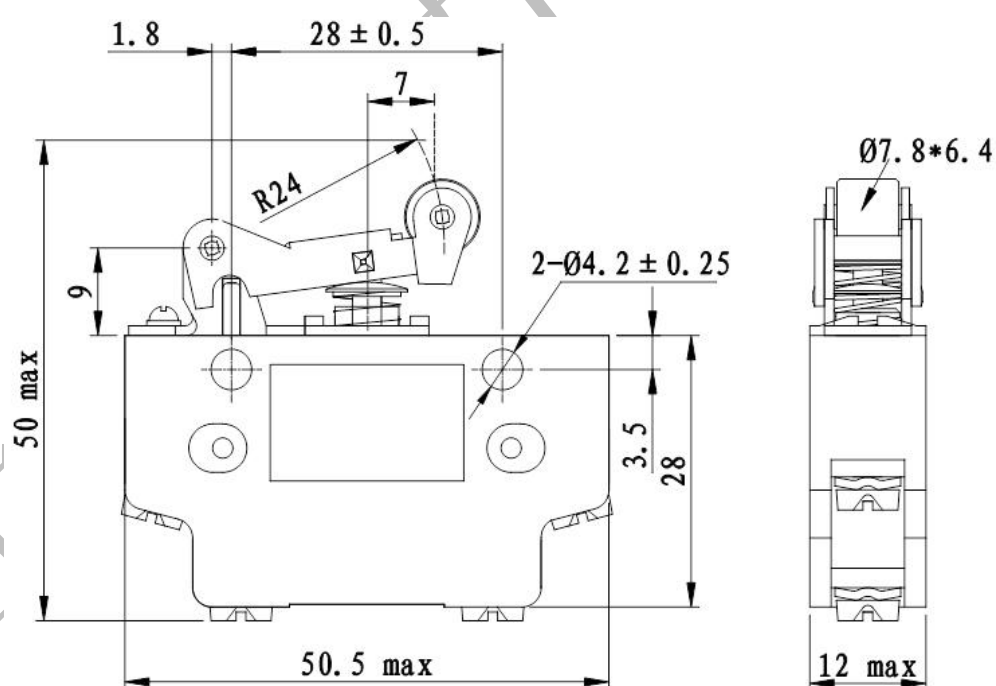





● Dimensions and operating Characteristics

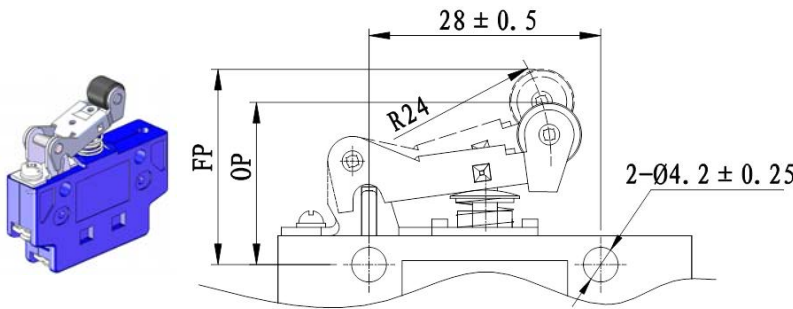

Type	
operating characteristics	LXW22-11□B
OF: (N)	2~5
RF: (N)	≥1
FP: (mm)	23~24
OP: (mm)	19.6~20.6
TTP: (mm)	16.3~16.8
RP: (mm)	21.4~22.4

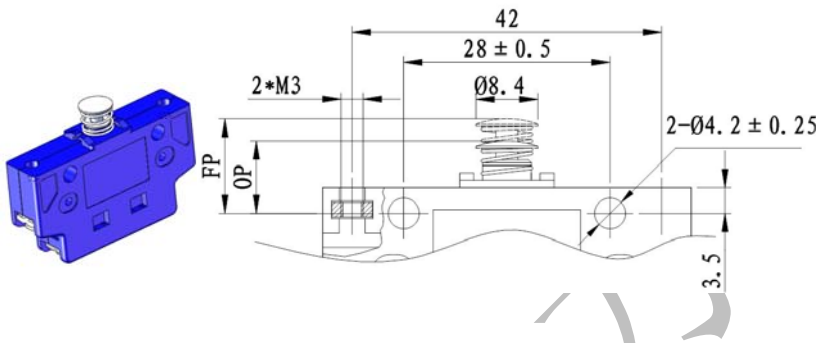




Type	
operating characteristics	LXW22-11□
OF: (N)	2.7~6.7
RF: (N)	≥1.4
FP: (mm)	12.15~12.55
OP: (mm)	9.75~10.45
TTP: (mm)	8.95~9.35
RP: (mm)	10.95~11.65

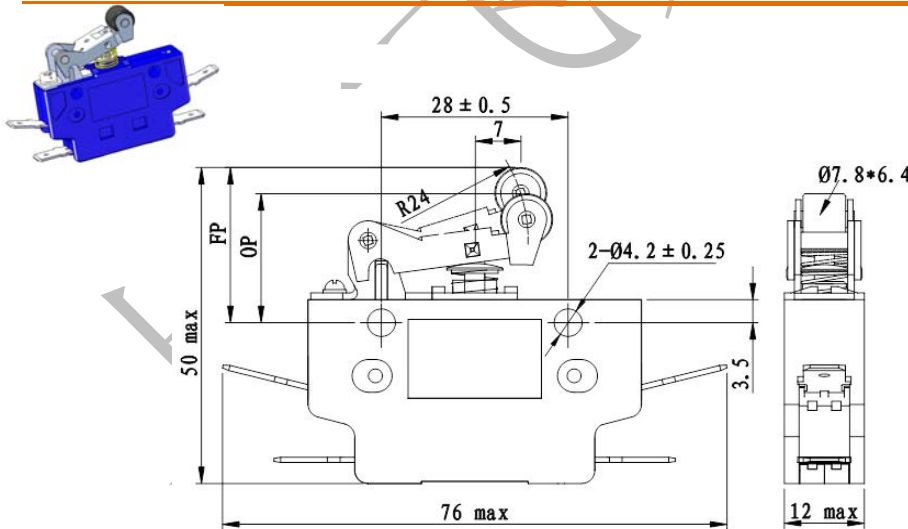

Type	
operating characteristics	LXW22-11B
OF: (N)	2±0.3
RF: (N)	≥0.4
FP: (mm)	23~24
OP: (mm)	19.6~20.6
MD: (mm)	1.8±0.4
RP: (mm)	21.4~22.4


订购电话: 021-59585666 传真: 021-69968999 邮箱: webmaster@shfeili.com 网址: www.shfeili.com QQ: 2660186152

订购事项: 本选型手册所记载的各项产品设计规格参数仅供选型时参考, 由于各种原因可能会未经通知进行变更, 购买时请即时联络客户经理, 获取针对具体型号发布的最新技术规格作为唯一的设计依据

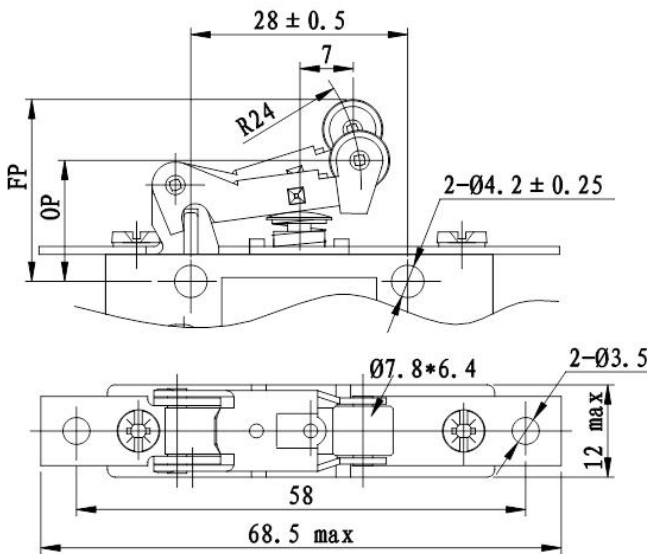

Type	LXW22-11□B
operating characteristics	
OF: (N)	2~5
RF: (N)	≥ 1
FP: (mm)	23~24
OP: (mm)	19.6~20.6
TTP: (mm)	16.3~16.8
RP: (mm)	21.4~22.4



6

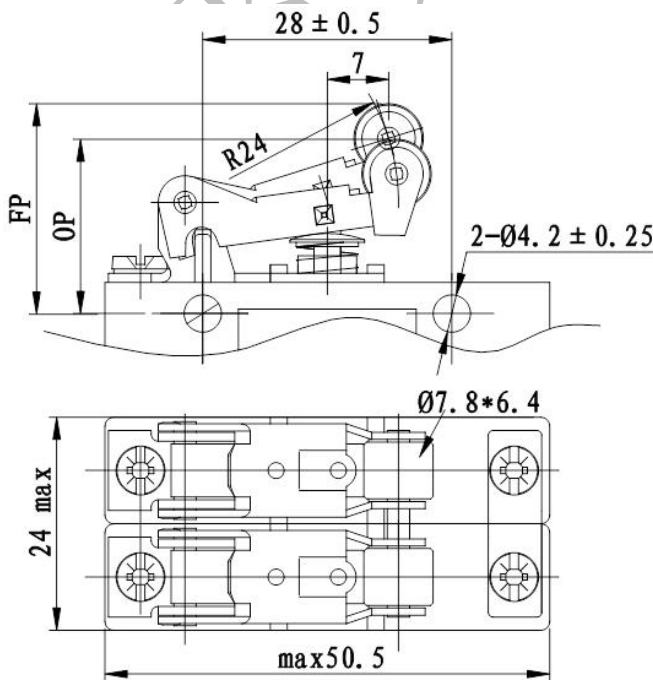

Type	LXW22-11□B
operating characteristics	
OF: (N)	4~10
RF: (N)	≥ 2
FP: (mm)	23~24
OP: (mm)	19.6~20.6
MD: (mm)	1.8 ± 0.8
RP: (mm)	21.4~22.4



订购电话: 021-59585666 传真: 021-69968999 邮箱: webmaster@shfeili.com 网址: www.shfeili.com QQ: 2660186152

订购事项: 本选型手册所记载的各项产品设计规格参数仅供选型时参考, 由于各种原因可能会未经通知进行变更, 购买时请即时联络客户经理, 获取针对具体型号发布的最新技术规格作为唯一的设计依据

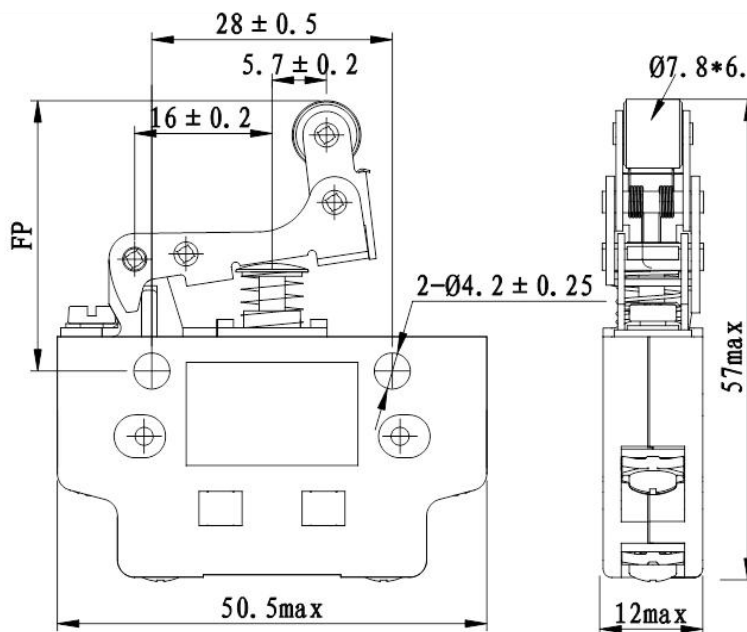

Type	LXW22-11B
operating characteristics	
OF: (N)	2 ± 0.3
RF: (N)	≥ 0.4
FP: (mm)	≤ 32
OP: (mm)	27.7 ± 0.5
MD: (mm)	1.8 ± 0.4
OT: (mm)	> 3


7

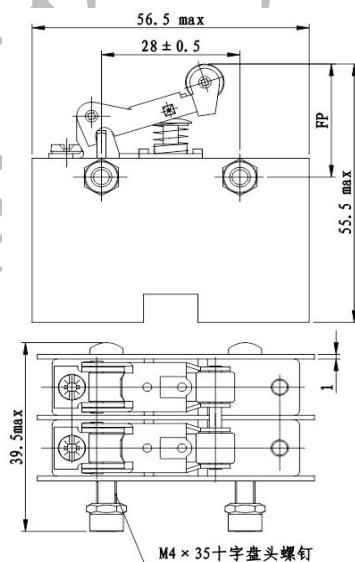

Type	LXW22-11□B
operating characteristics	
OF: (N)	$4 \sim 10$
RF: (N)	≥ 2
FP: (mm)	$23 \sim 24$
OP: (mm)	$19.6 \sim 20.6$
TTP: (mm)	$16.3 \sim 16.8$
RP: (mm)	$21.4 \sim 22.4$



For more specifications, please contact our account manager



●Precautions for correct use

Please read this page carefully before use, common precaution please refer to relevant pages in summary.

◆Mounting

Use M3 mounting screws to securely mount the Switch. Tighten the screws to a torque of 0.4 to 0.6 N·m

Use M4 mounting screws to securely mount the Switch. Tighten the screws to a torque of 1 to 1.4 N·m