



● Features & Application

- ◆ Quick & Reliable action, high precision, long life
- ◆ Different contact material like silver composite or silver for different electrical load application
- ◆ Change-over, double gap, contact element with four terminals, contact form: Zb. Electrical isolation, can be used with mixed voltage.
- ◆ During each operation this wiping action results in self-cleaning of the contacts on one side.
- ◆ Variety of auxiliary actuating type to meet different occasions.
- ◆ Applicable to the control circuit with AC 250V, DC 250V, used as parts for master electrical appliances or alternative appliances.
- ◆ This product is widely used for controlling electromagnet or inductive load, such as home appliance, machine tool, power electronic and automation application.

● code instruction

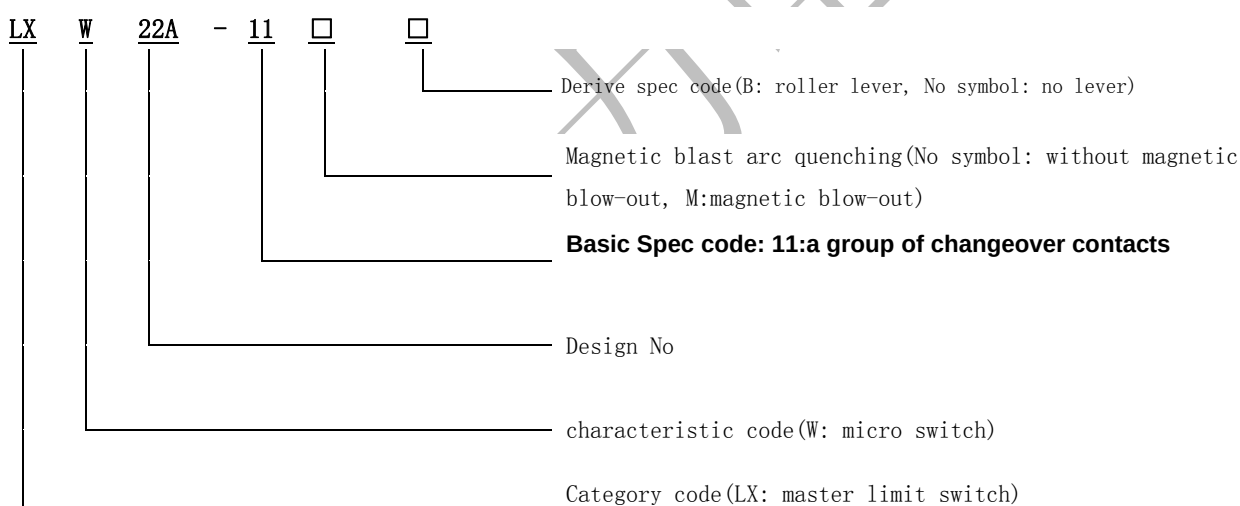



Technical Specification

item	characteristics			
Utilization Category	AC-15	DC-13		
Ui	250V			
Ith	16A			
Ue	250V	250V		
Ie	2. 5A	0. 5A		
contact resistance	≤30mΩ			
power frequency withstand voltage	Between current-carrying parts on separate electrical switch elements		AC1500V±3% 45～65Hz 5s	
	between current-carrying components and surface easy to touch		AC1500V±3% 45～65Hz 5s	
	between current-carrying metal parts and the ground		AC1500V±3% 45～65Hz 5s	
mechanical life	≥300, 000operations			
electrical life	≥30, 000operations			
Ambient operating temperature	-25℃～85℃			
IPlevel	IP00			


Approved standards

	CCC CE
LXW22A-11□	Ith:16A AC-15 250V 2.5A
LXW22A-11M□	Ith:16A AC-15 250V 2.5A DC-13 250V 0.5A

★ For more parameters, please contact our account manager


订购电话: 021-59585666 传真: 021-69968999 邮箱: webmaster@shfeili.com 网址: www.shfeili.com QQ: 2660186152

订购事项: 本选型手册所记载的各项产品设计规格参数仅供选型时参考, 由于各种原因可能会未经通知进行变更, 购买时请即时联络客户经理, 获取针对具体型号发布的最新技术规格作为唯一的设计依据




● contact form

◆ 11 changeover




● terminal



M3 tile pad bolt

★ For more terminal types, please contact our account manager




● Dimensions and operating Characteristics

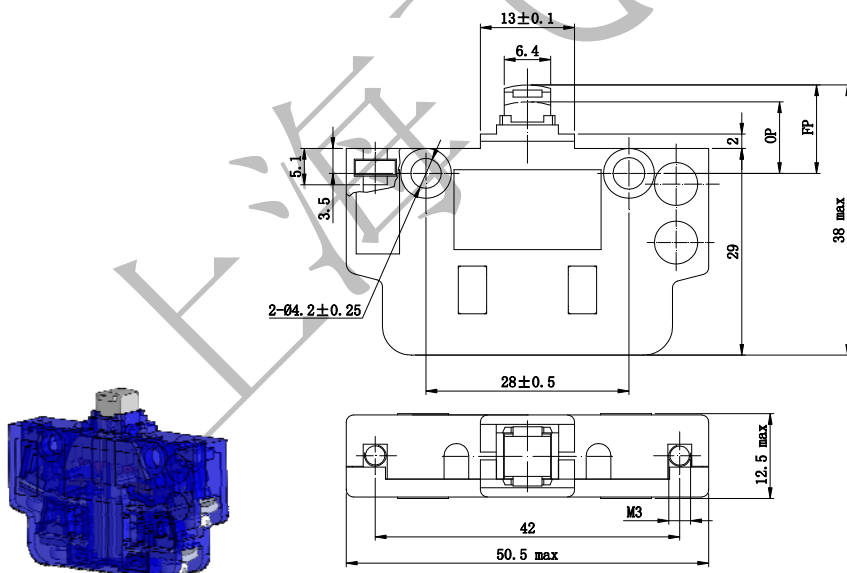

type	LXW22A-11 LXW22A-11M
operating characteristics	
OF: (N)	2.2~3
RF: (N)	≥0.6
FP:(mm)	12.15~12.55
OP: (mm)	9.85~10.35
MD: (mm)	1.2±0.25
OT: (mm)	≥0.4

订购电话: 021-59585666 传真: 021-69968999 邮箱: webmaster@shfeili.com 网址: www.shfeili.com QQ: 2660186152

订购事项: 本选型手册所记载的各项产品设计规格参数仅供选型时参考, 由于各种原因可能会未经通知进行变更, 购买时请即时联络客户经理, 获取针对具体型号发布的最新技术规格作为唯一的设计依据

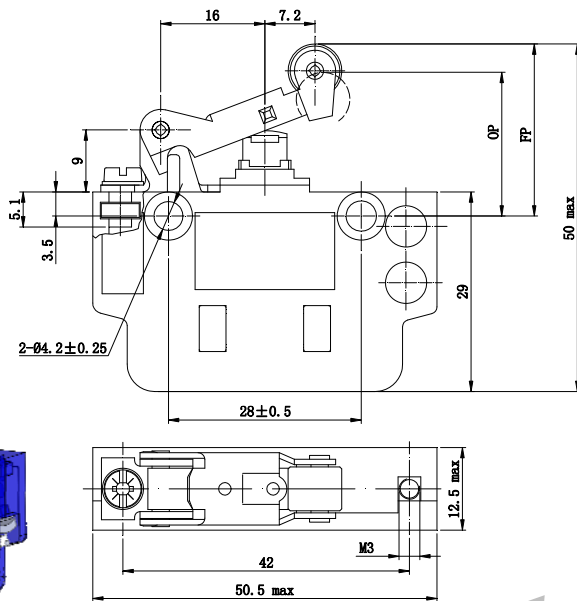

type	
operating characteristics	LXW22A-11B LXW22A-11MB
OF: (N)	≥0.4
RF: (N)	0.8~1.6
FP:(mm)	23~24
OP: (mm)	19.6~20.6
MD: (mm)	1.8±0.37
OT: (mm)	≥2.5

★For more specifications, please contact our account manager ●precautions for correct use

Please read this page carefully before use, common precaution please refer to relevant pages in summary

◆Mounting

Use M4 mounting screws with plane washers or spring washers. To securely mount the Switch.

Tighten the screws to a torque of 0.8 to 1.2 N·m.

◆insulation distance

Minimum insulating layer thickness for this micro switch is 1.1mm. Minimum space distance is 1.9mm between terminal and mounting plate. Please use insulating shields or partition to keep safe insulating distance if it failed to secure insulating distance required