



● Features & Application

- ◆ Quick & Reliable action, high precision, long life
- ◆ Normally close micro travel switch
- ◆ No protection of case and open structure with automatic reattachment
- ◆ Connection method: 0.5mm² outgoing line, length can be customized.
- ◆ outgoing line can be contacted with sheath, type of sheath is optional.
- ◆ Button of switch is made of FR-PBT-20 engineering plastic, high mechanical strength, abrasion-proof.
- ◆ Applicable to the control circuit or auxiliary circuit with DC 12V, used as signal controlling, interlock and limitation
- ◆ Widely used in auto industry and supporting the use with door lock products.


● Code instruction

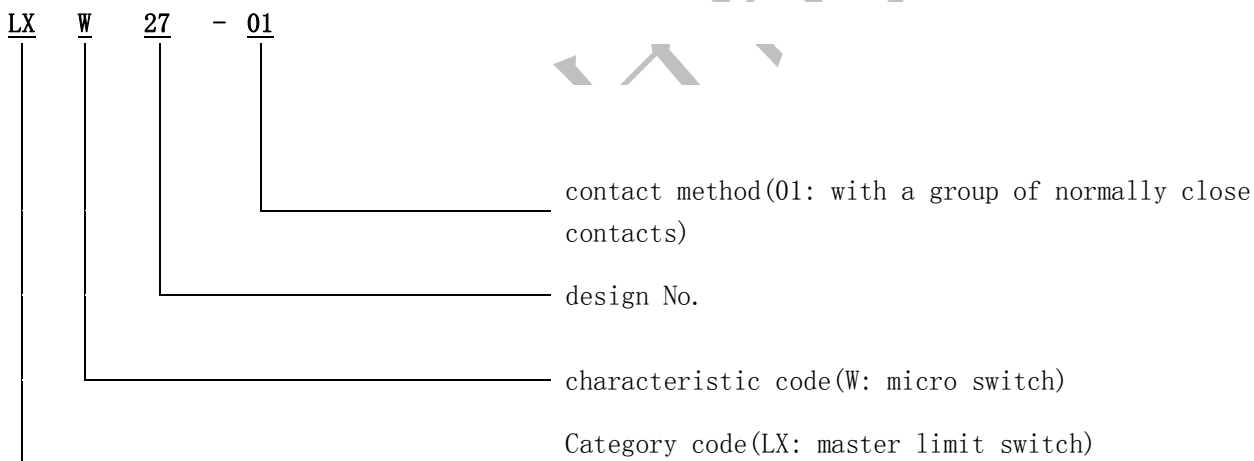




● Technical Specification

item	characteristics	
Utilization Category	DC-12	DC-13
Ui	DC24V	
Ith	4A	
Ue	DC12V	
Ie	3A	1A
contact resistance	$\leq 30 \Omega$ not including wire resistance	
mechanical life	≥ 300000 times operations	
electrical life	≥ 100000 times operations	
Ambient operating temperature	$-25^{\circ}\text{C} \sim 40^{\circ}\text{C}$	
IP level:	00	



●Dimensions

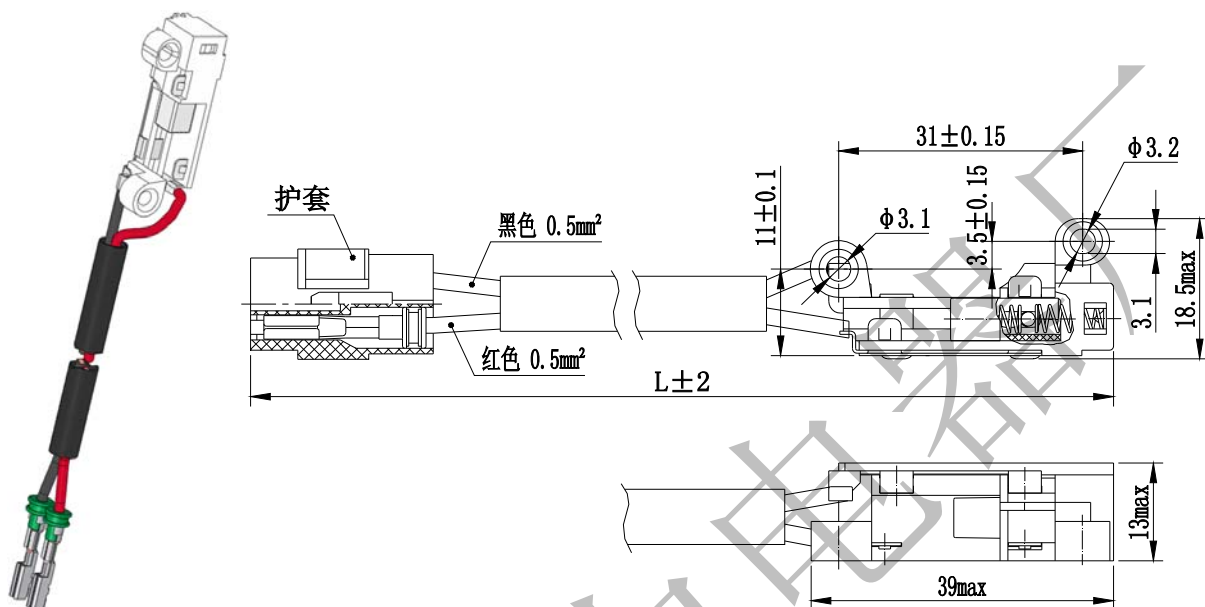

Note: 1. Size and length of wire can be customized, standard length: 322mm;

2. Sheath is optional.

★For more specifications, please contact our account manager

●Precautions for correct use

Please read this page carefully before use, common precaution please refer to relevant pages in summary.

◆Mounting

Use M3 mounting screws with plane washers or spring washers. To securely mount the Switch.

Tighten the screws to a torque of 0.39 to 0.59 N•m.

订购电话: 021-59585666 传真: 021-69968999 邮箱: webmaster@shfeili.com 网址: www.shfeili.com QQ: 2660186152

订购事项: 本选型手册所记载的各项产品设计规格参数仅供选型时参考, 由于各种原因可能会未经通知进行变更, 购买时请即时联络客户经理, 获取针对具体型号发布的最新技术规格作为唯一的设计依据