



● Features & Application

- ◆ Different contact material like silver alloy for different electrical load application
- ◆ Applicable to control circuit or auxiliary circuit with rated working voltage AC 380V and DC 250V. More technical characteristics will be shown as in the table below.
- ◆ This product is widely used for home appliance, machine tool, power electronic and automation application.
- ◆ No Instantaneous mechanism, general structure with automatic reset function.

● Code instruction

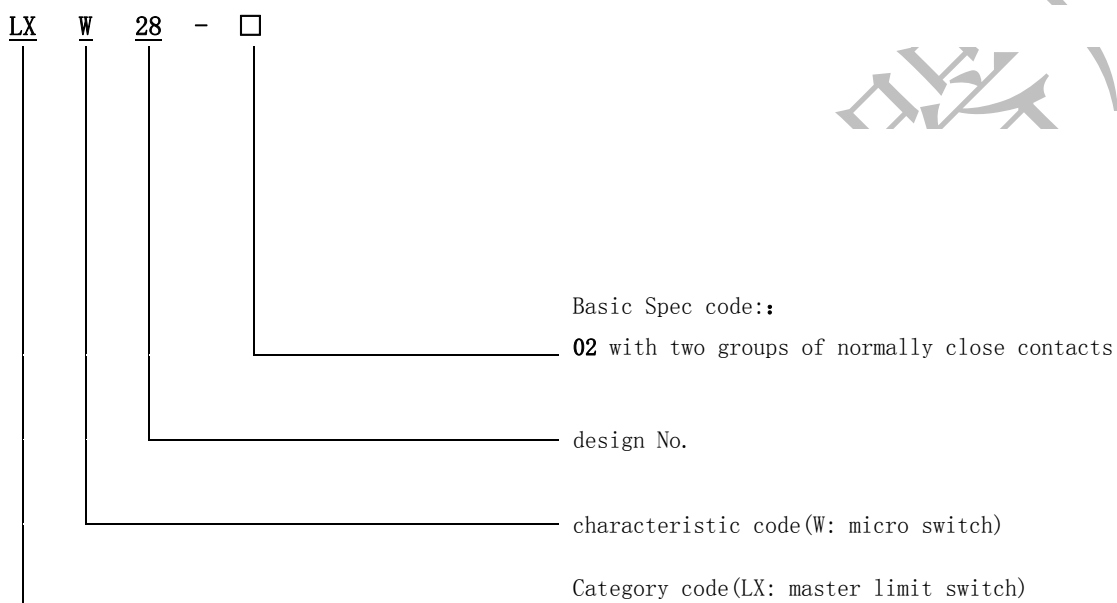




Technical Specification

item	characteristic	
Ui	380V	
Ith	22A	
Contact resistance	$\leq 30m\Omega$	
Power frequency withstand voltage	Between charged parts of separate switch element in electric	AC1890V $\pm 3\%$ 45~65Hz 5s
	Between current-carrying metal parts and the ground	AC1890V $\pm 3\%$ 45~65Hz 5s
Mechanical life	$\geq 500,000$ times operations	
Electrical life	AC $\geq 200,000$ times operations; DC $\geq 100,000$ times operations	
Ambient operating temperature	$-5^{\circ}\text{C} \sim +40^{\circ}\text{C}$	


★For more parameters, please contact our account manager

wiring symbol and wiring method

◆ Screw connection:

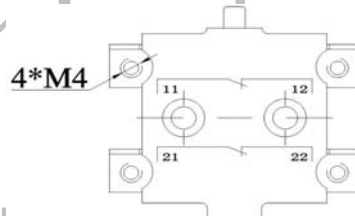


Dimensions and operating Characteristics

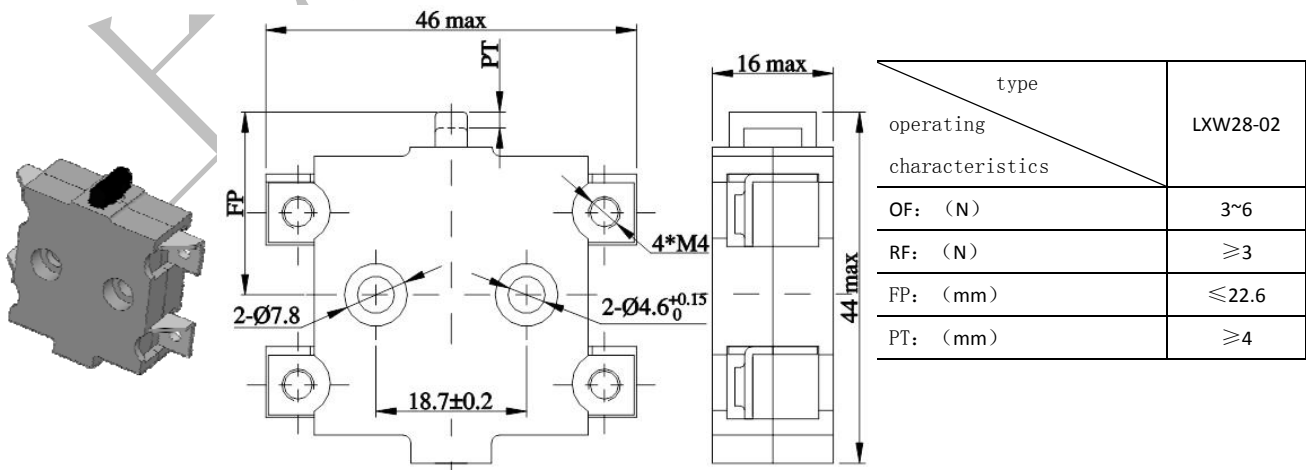

订购电话: 021-59585666 传真: 021-69968999 邮箱: webmaster@shfeili.com 网址: www.shfeili.com QQ: 2660186152

订购事项: 本选型手册所记载的各项产品设计规格参数仅供选型时参考, 由于各种原因可能会未经通知进行变更, 购买时请即时联络客户经理, 获取针对具体型号发布的最新技术规格作为唯一的设计依据



★For more specification, please contact our account manager

●Precautions for correct use

Please read this page carefully before use, common precaution please refer to relevant pages in summary.

◆Mounting

Use M4.5 mounting screws To securely mount the Switch. Tighten the screws to a torque of 1.5 to 2 N•m.