


### ●Features & Application

- ◆Quick & Reliable action, high precision, long life
- ◆Applicable to the control circuit or auxiliary circuit with up to AC 400V, used as controlling, signal and interlocking.

### ●code instruction

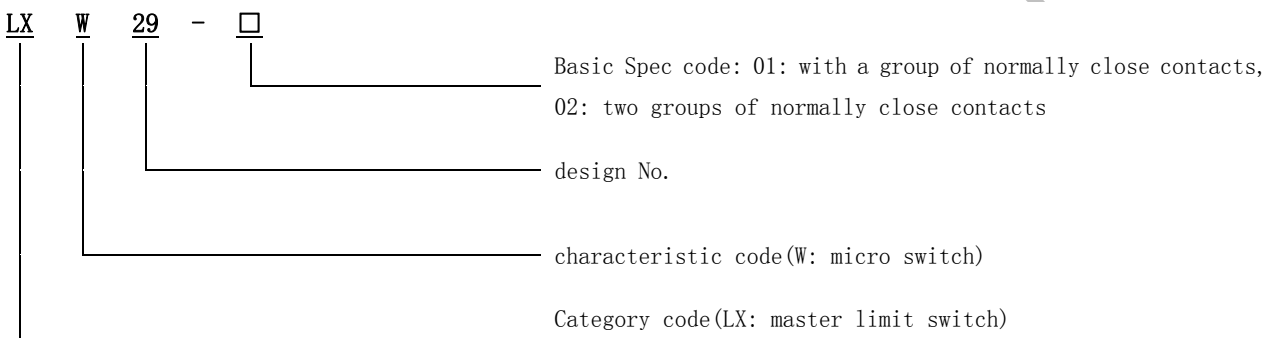

### ●Technical Characteristics

| Item                              | characteristic                                |                  |            |
|-----------------------------------|-----------------------------------------------|------------------|------------|
| Utilization Category              | AC-15                                         |                  |            |
| Ui                                | 400V                                          |                  |            |
| Ue                                | 400V                                          |                  |            |
| Ie                                | 10A                                           |                  |            |
| contact resistance                | $\leq 30m\Omega$                              |                  |            |
| power frequency withstand voltage | 开关带电元件与易于触及的表面间                               | AC1890V $\pm$ 3% | 45~65Hz 5s |
|                                   | 带电零件对地                                        | AC1890V $\pm$ 3% | 45~65Hz 5s |
| mechanical life                   | $\geq 300,000$ 次                              |                  |            |
| electrical life                   | $\geq 300,000$ 次                              |                  |            |
| Ambient operating temperature     | $-25^{\circ}\text{C} \sim 45^{\circ}\text{C}$ |                  |            |
| IP level:                         | 00                                            |                  |            |


订购电话: 021-59585666 传真: 021-69968999 邮箱: [webmaster@shfeili.com](mailto:webmaster@shfeili.com) 网址: [www.shfeili.com](http://www.shfeili.com) QQ: 2660186152

订购事项: 本选型手册所记载的各项产品设计规格参数仅供选型时参考, 由于各种原因可能会未经通知进行变更, 购买时请即时联络客户经理, 获取针对具体型号发布的最新技术规格作为唯一的设计依据




## ● contact form

◆01 a group of normally close contacts




◆02 two group of normally close contacts

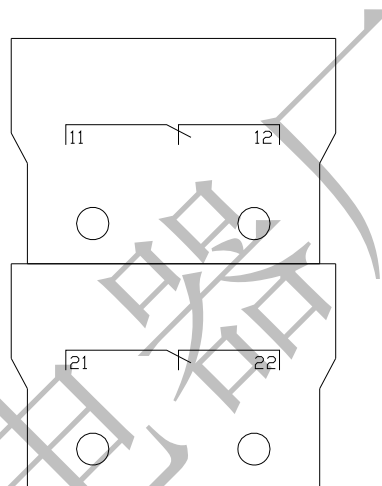

## ● terminal


◆M3 Screw connection

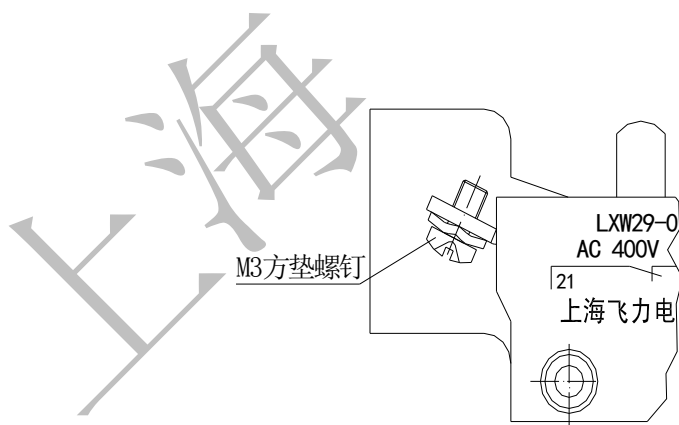



★For more terminal types, please contact our account manager

订购电话: 021-59585666 传真: 021-69968999 邮箱: [webmaster@shfeili.com](mailto:webmaster@shfeili.com) 网址: [www.shfeili.com](http://www.shfeili.com) QQ: 2660186152

订购事项: 本选型手册所记载的各项产品设计规格参数仅供选型时参考, 由于各种原因可能会未经通知进行变更, 购买时请即时联络客户经理, 获取针对具体型号发布的最新技术规格作为唯一的设计依据





●Dimensions and operating Characteristics

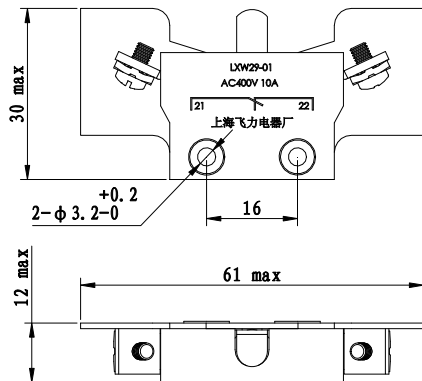

| type                      | LXW29—01 |
|---------------------------|----------|
| operating characteristics |          |
| OF: (N)                   | 1~4      |
| RF: (N)                   | ≥0.8     |
| PT: (mm)                  | 2.5±1    |
| MD: (mm)                  | ≤1.6     |
| OT: (mm)                  | ≥3       |

3

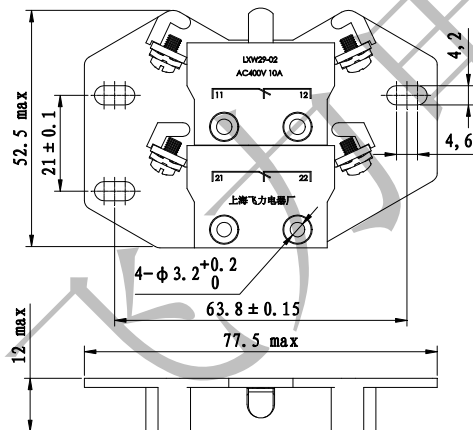

| type                      | LXW29—02 |
|---------------------------|----------|
| operating characteristics |          |
| OF: (N)                   | 1~4      |
| RF: (N)                   | ≥0.8     |
| PT: (mm)                  | 2.5±1    |
| MD: (mm)                  | ≤1.6     |
| OT: (mm)                  | ≥3       |

★For more specification, please contact our account manager



●precautions for correct use

Please read this page carefully before use, common precaution please refer to relevant pages in summary.

◆Mounting

Use M3 mounting screws with plane washers or spring washers to securely mount the Switch. Tighten the screws to a torque of 0.39 to 0.59 N•m.