



● Features & Application

- ◆ Quick and reliable action、high precision、long life.
- ◆ Different contact material like silver-copper bimetal strips, silver alloy or silver for different electrical load application
- ◆ Variety of actuating types to meet to meet different occasions.
- ◆ Applicable to the control circuit with AC 380V, DC 250V, used as parts for master electrical appliances or alternative appliances.
- ◆ This product is widely used in the field of machine tools, machinery ,doors interlocking etc.

● code instruction

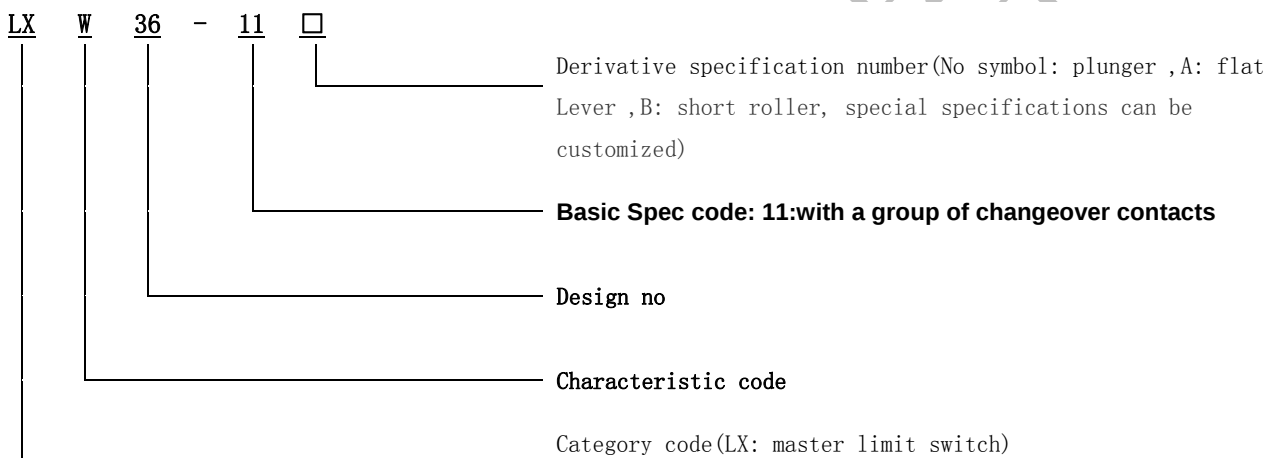



● Technical characteristics


item	characteristics			
Utilization Category	AC-15	DC-13		
Ui	250V			
Ith	10A			
Ue	250V	60V	24V	
Ie	1. 5A	0. 5A	2A	
contact resistance	≤30m Ω			
power frequency withstand voltage	between current-carrying components and surface easy to touch		AC1890V±3% 45~65Hz 5s	
	Between current-carrying metal parts and the ground		AC1890V±3% 45~65Hz 5s	
mechanical life	≥1, 000, 000operations			
electrical life	≥100, 000operations			
Ambient operating temperature	-25℃~85℃			
IP level	IP40 where contacts works			

● Approved standards

	CCC、CE
	Ith:10A
LXW36-11 ☐	AC-15 250V 1.5A
	DC-13 60V 0.5A , 24V 2A

订购电话: 021-59585666 传真: 021-69968999 邮箱: webmaster@shfeili.com 网址: www.shfeili.com QQ: 2660186152



订购事项: 本选型手册所记载的各项产品设计规格参数仅供选型时参考, 由于各种原因可能会未经通知进行变更, 购买时请即时联络客户经理, 获取针对具体型号发布的最新技术规格作为唯一的设计依据




★For more parameters, please contact our account manager

●contact form

◆11changover

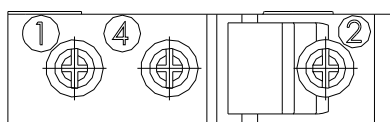


●terminals form

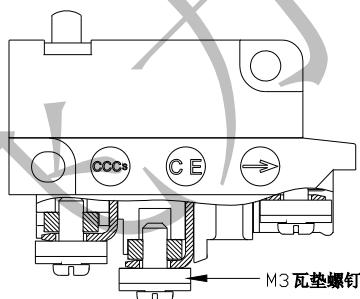


★For more terminal types, please contact our account manager

●actuating type

A lever:

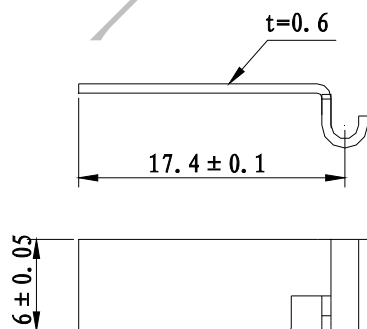


B lever:

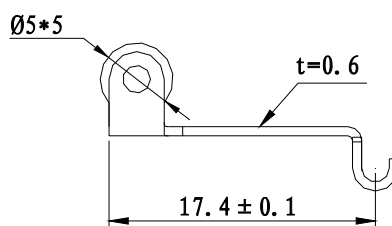




订购电话: 021-59585666 传真: 021-69968999 邮箱: webmaster@shfeili.com 网址: www.shfeili.com QQ: 2660186152

订购事项: 本选型手册所记载的各项产品设计规格参数仅供选型时参考, 由于各种原因可能会未经通知进行变更, 购买时请即时联络客户经理, 获取针对具体型号发布的最新技术规格作为唯一的设计依据




★For more actuating type ,please contact our account manager

●Dimensions and operating characteristics

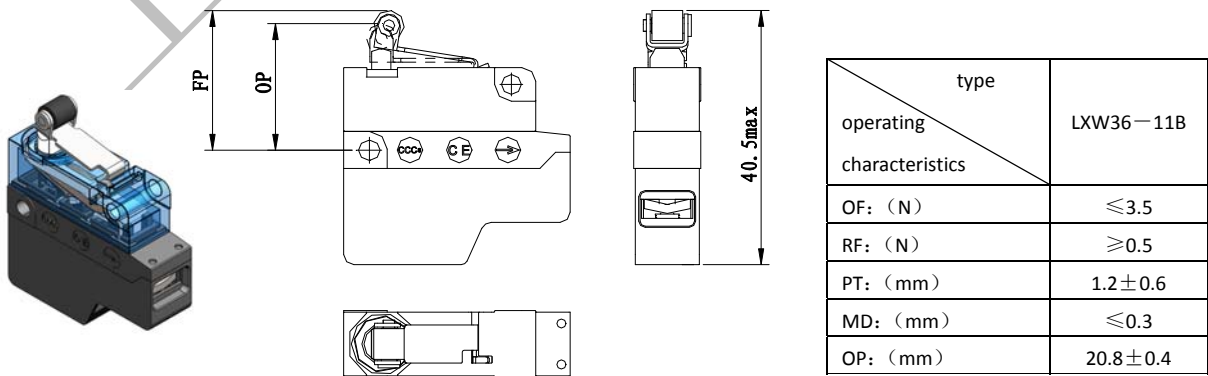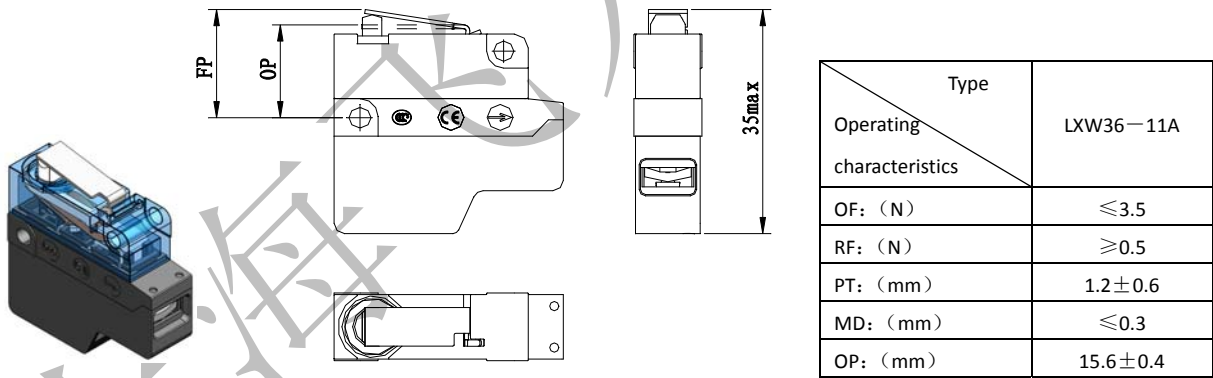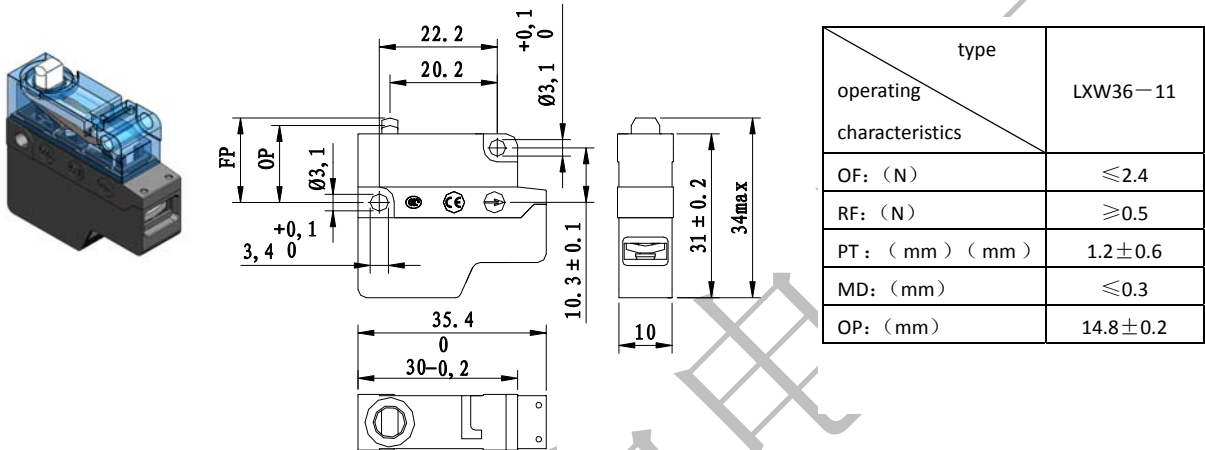

订购电话: 021-59585666 传真: 021-69968999 邮箱: webmaster@shfeili.com 网址: www.shfeili.com QQ: 2660186152

订购事项: 本选型手册所记载的各项产品设计规格参数仅供选型时参考, 由于各种原因可能会未经通知进行变更, 购买时请即时联络客户经理, 获取针对具体型号发布的最新技术规格作为唯一的设计依据



★For more product specifications, please contact our account manager

●precautions for correct use

Please read this page carefully before use, common precaution please refer to relevant pages in summary

◆mounting

Use M3 mounting screws with plane washers or spring washers to securely mount the Switch. Tighten the screws to a torque of 0.39 to 0.59 N·m.

5