

**FAST ETHERNET M12 D-CODE**

**Non Shielded Cordsets**

- 0985 806 100/...M Male straight to Male straight
- 0985 806 125/...M Male 90° to Male straight
- 0985 806 124/...M Male 90° to Male 90°

**Shielded Cordsets**

- 0985 YM57530 100/...M Male straight to Male straight



**Non Shielded Cordsets**

- 0985 806 102/...M Male straight to Female Straight
- 0985 806 127/...M Male 90° to Female Straight

**Shielded Cordsets**

- 0985 YM57530 102/...M Male straight to Female straight



**Shielded Field Wireables**

- RSCIS 4D/9 Male straight



**GIGABIT ETHERNET M12 X-CODE**

**Shielded Cordsets**

- RSTS 8X-RSTS 8X-478/...M Male straight to Male straight
- RSTS 8X-478/...M Male straight




**Shielded Field Wireables**

- 0986 EMC 600 Male straight




Standard Cordset lengths in meters: 0.3 , 0.6 , 1 , 2 , 5 , 10 , 12 , 15 , 20 , 25 , 30 , 40 , 50 , 60 , 70 , 80  
Contact Inside Sales for additional lengths options

## Gigabit M12 X-Code Media Cordsets


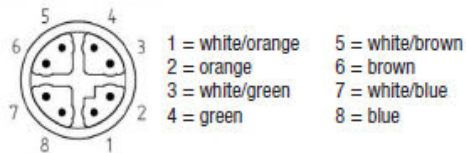


Technical Data	
<b>Current Rating</b>	0.5 amps
<b>Voltage Rating</b>	48 Volts
<b>Operating Temperature</b>	-40°C — +80° C
<b>Degree of Protection</b>	IP 67
<b>Approvals</b>	UL

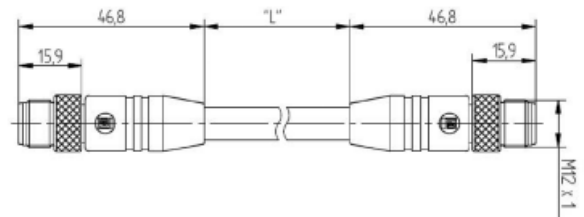

Part Number	Description	Gender	Pins	Cable Material	Cable Awg	Color Coding	Length (M)
934809007	RSTS 8X-RSTS 8X-478/10M	Male to Male	8	PUR Black	24	-	10
934809008	RSTS 8X-RSTS 8X-478/15M	Male to Male	8	PUR Black	24	-	15
Call	RSTS 8X-RSTS 8X-478/20M	Male to Male	8	PUR Black	24	-	20
Call	RSTS 8X-RSTS 8X-478/25M	Male to Male	8	PUR Black	24	-	25
Call	RSTS 8X-RSTS 8X-478/30M	Male to Male	8	PUR Black	24	-	30
Call	RSTS 8X-RSTS 8X-478/40M	Male to Male	8	PUR Black	24	-	40

Please contact Inside Sales for other available lengths

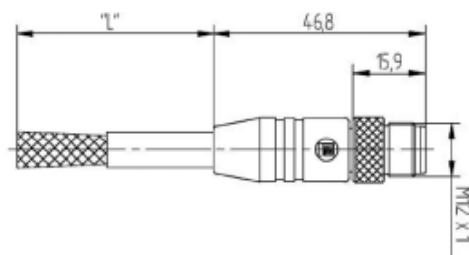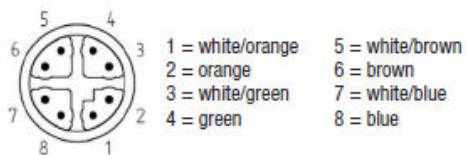



Part Number	Description	Gender	Pins	Cable Material	Cable Awg	Color Coding	Length (M)
934809003	RSTS 8X-478/10M	Male to Male	8	PUR Black	24	-	10
934809004	RSTS 8X-478/15M	Male to Male	8	PUR Black	24	-	15
Call	RSTS 8X-478/20M	Male to Male	8	PUR Black	24	-	20
Call	RSTS 8X-478/25M	Male to Male	8	PUR Black	24	-	25
Call	RSTS 8X-478/30M	Male to Male	8	PUR Black	24	-	30
Call	RSTS 8X-478/40M	Male to Male	8	PUR Black	24	-	40

Please contact Inside Sales for other available lengths

## Fast Ethernet M12 Media Cordsets Non Shielded





Technical Data	
<b>Current Rating</b>	4A
<b>Voltage Rating</b>	250V
<b>Operating Temperature</b>	-40°C to +75°C
<b>Degree of Protection</b>	IP68
<b>Approvals</b>	RoHS

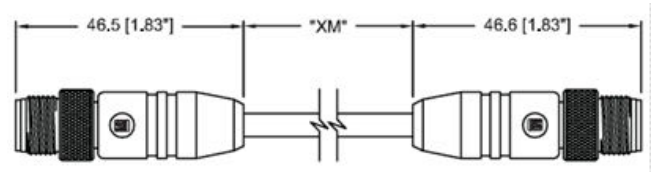

Part Number	Description	Gender	Pins	Cable Material	Cable Awg	Color Coding	Length (M)
900004049	0985 806 100/10M	Male to Male	4	TPE Teal	24	-	10
900004051	0985 806 100/15M	Male to Male	4	TPE Teal	24	-	15
900004053	0985 806 100/20M	Male to Male	4	TPE Teal	24	-	20
900004054	0985 806 100/25M	Male to Male	4	TPE Teal	24	-	25
900004057	0985 806 100/30M	Male to Male	4	TPE Teal	24	-	30
900004060	0985 806 100/40M	Male to Male	4	TPE Teal	24	-	40

Please contact Inside Sales for other available lengths

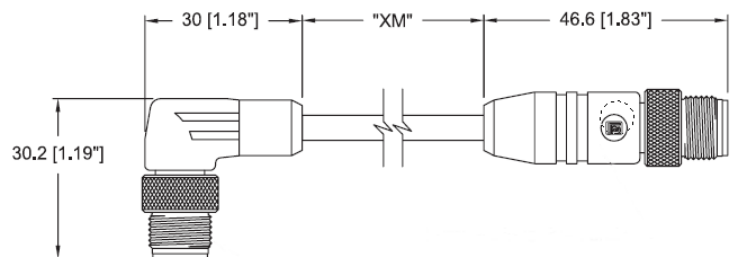



Part Number	Description	Gender	Pins	Cable Material	Cable Awg	Color Coding	Length (M)
900004191	0985 806 125/10M	Male to Male	4	TPE Teal	24	-	10
900004192	0985 806 125/15M	Male to Male	4	TPE Teal	24	-	15
900004194	0985 806 125/20M	Male to Male	4	TPE Teal	24	-	20
Call	0985 806 125/25M	Male to Male	4	TPE Teal	24	-	25
900004196	0985 806 125/30M	Male to Male	4	TPE Teal	24	-	30
900004198	0985 806 125/40M	Male to Male	4	TPE Teal	24	-	40

Please contact Inside Sales for other available lengths

## Fast Ethernet M12 Media Cordsets Non Shielded



Technical Data	
<b>Current Rating</b>	4A
<b>Voltage Rating</b>	250V
<b>Operating Temperature</b>	-40°C to +75°C
<b>Degree of Protection</b>	IP68
<b>Approvals</b>	RoHS

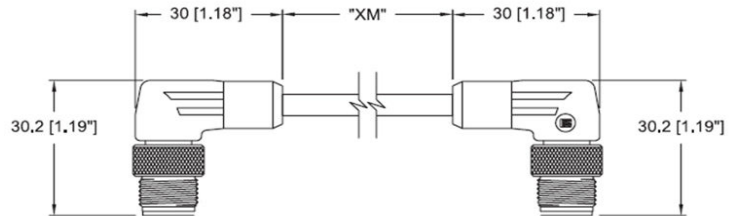



Part Number	Description	Gender	Pins	Cable Material	Cable Awg	Color Coding	Length (M)
900004176	0985 806 124/10M	Male to Male	4	TPE Teal	24	-	10
900004177	0985 806 124/15M	Male to Male	4	TPE Teal	24	-	15
900004179	0985 806 124/20M	Male to Male	4	TPE Teal	24	-	20
Call	0985 806 124/25M	Male to Male	4	TPE Teal	24	-	25
900004181	0985 806 124/30M	Male to Male	4	TPE Teal	24	-	30
900004183	0985 806 124/40M	Male to Male	4	TPE Teal	24	-	40

Please contact Inside Sales for other available lengths

## Fast Ethernet M12 Media Cordsets Non Shielded





Technical Data	
<b>Current Rating</b>	4A
<b>Voltage Rating</b>	250V
<b>Operating Temperature</b>	-40°C to +75°C
<b>Degree of Protection</b>	IP68
<b>Approvals</b>	RoHS

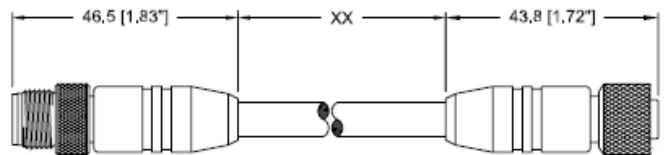

Part Number	Description	Gender	Pins	Cable Material	Cable Awg	Color Coding	Length (M)
900004070	0985 806 102/10M	Male to Female	4	TPE Teal	24	-	10
900004522	0985 806 102/15M	Male to Female	4	TPE Teal	24	-	15
Call	0985 806 102/20M	Male to Female	4	TPE Teal	24	-	20
Call	0985 806 102/25M	Male to Female	4	TPE Teal	24	-	25
Call	0985 806 102/30M	Male to Female	4	TPE Teal	24	-	30
Call	0985 806 102/40M	Male to Female	4	TPE Teal	24	-	40

Please contact Inside Sales for other available lengths

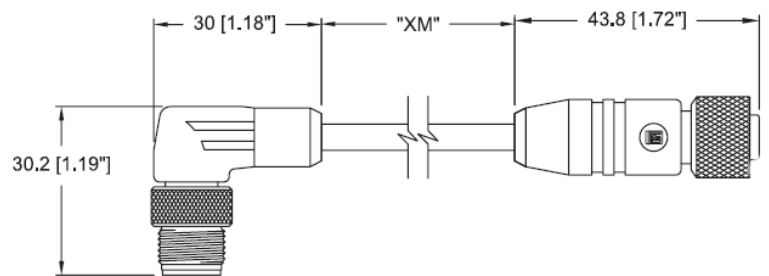



Part Number	Description	Gender	Pins	Cable Material	Cable Awg	Color Coding	Length (M)
900004221	0985 806 127/10M	Male to Female	4	TPE Teal	24	-	10
900004222	0985 806 127/15M	Male to Female	4	TPE Teal	24	-	15
900004224	0985 806 127/20M	Male to Female	4	TPE Teal	24	-	20
Call	0985 806 127/25M	Male to Female	4	TPE Teal	24	-	25
900004226	0985 806 127/30M	Male to Female	4	TPE Teal	24	-	30
900004228	0985 806 127/40M	Male to Female	4	TPE Teal	24	-	40

Please contact Inside Sales for other available lengths

## Fast Ethernet M12 Media Cordsets Shielded





Technical Data	
<b>Current Rating</b>	4A
<b>Voltage Rating</b>	250V
<b>Operating Temperature</b>	-40°C to +75°C
<b>Degree of Protection</b>	IP68
<b>Approvals</b>	RoHS

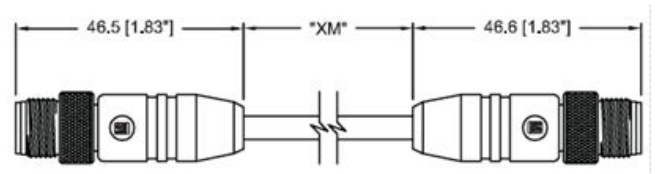

Part Number	Description	Gender	Pins	Cable Material	Cable Awg	Color Coding	Length (M)
900004141	0985 YM57530 100/10M	Male to Male	4	TPE Teal	24	-	10
900004142	0985 YM57530 100/15M	Male to Male	4	TPE Teal	24	-	15
900004143	0985 YM57530 100/20M	Male to Male	4	TPE Teal	24	-	20
900004348	0985 YM57530 100/25M	Male to Male	4	TPE Teal	24	-	25
900004144	0985 YM57530 100/30M	Male to Male	4	TPE Teal	24	-	30
900004349	0985 YM57530 100/40M	Male to Male	4	TPE Teal	24	-	40

Please contact Inside Sales for other available lengths

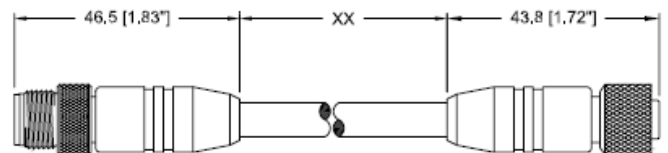


Part Number	Description	Gender	Pins	Cable Material	Cable Awg	Color Coding	Length (M)
Available Q1 2015	0985 YM57530 102/10M	Male to Female	4	TPE Teal	24	-	10
Available Q1 2015	0985 YM57530 102/15M	Male to Female	4	TPE Teal	24	-	15
Available Q1 2015	0985 YM57530 102/20M	Male to Female	4	TPE Teal	24	-	20
Available Q1 2015	0985 YM57530 102/25M	Male to Female	4	TPE Teal	24	-	25
Available Q1 2015	0985 YM57530 102/30M	Male to Female	4	TPE Teal	24	-	30
Available Q1 2015	0985 YM57530 102/40M	Male to Female	4	TPE Teal	24	-	40

Please contact Inside Sales for other available lengths

## Gigabit M12 X-Code Media Field Attachable



Technical Data	
<b>Current Rating</b>	0.5 amps
<b>Voltage Rating</b>	48 Volts
<b>Operating Temperature</b>	-25°C — +85° C
<b>Degree of Protection</b>	IP 67
<b>Approvals</b>	UL

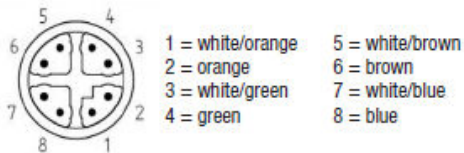

Part Number	Description	Gender	Pins	Cable diameter range
934637032	0986 EMC 600	Male	8	6-8 MM

## Fast Ethernet M12 D-Code Media Field Attachable



Technical Data	
<b>Current Rating</b>	4 amps
<b>Voltage Rating</b>	250 Volts
<b>Operating Temperature</b>	-25°C — +90° C
<b>Degree of Protection</b>	IP 67/ NEMA 6P
<b>Approvals</b>	UL

Part Number	Description	Gender	Pins	Cable diameter range
600005174	RSCIS 4D/9	Male	4	3-6.5 MM