

铝电解电容器 ALUMINUM ELECTROLYTIC CAPACITORS

适用于表面安装芯片形

- 芯片・编带仕様
- 载体胶带

图1
(适用于φ10以下)


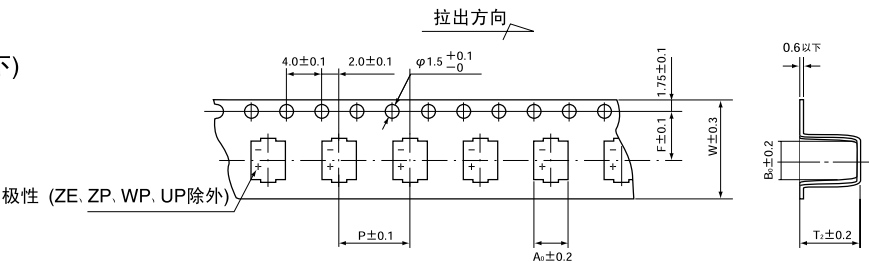



图2
(适用于φ12.5以上)

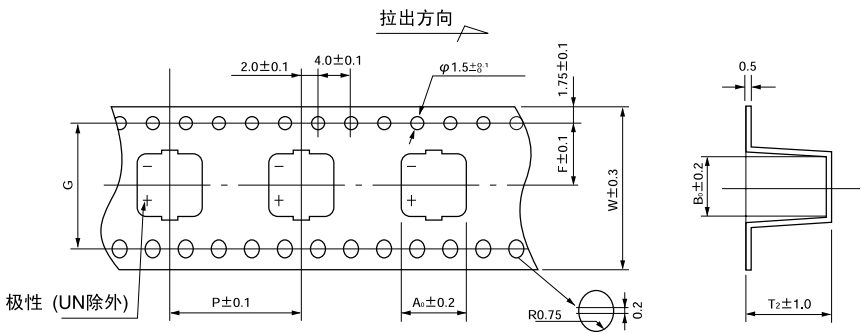


公称尺寸	项 目							形状	适用系列
	W	P	F	A0	B0	T2	G		
φ4 × 5.5 L	12.0	8.0	5.5	5.0	5.0	5.7	—	图1	CF、CJ、CG
φ5 × 6 L	12.0	12.0	5.5	6.0	6.0	6.3			
φ6.3 × 5.5 L	16.0	12.0	7.5	7.0	7.0	5.7			
φ6.3 × 6 L	16.0	12.0	7.5	7.0	7.0	6.3			
φ6.3 × 8 L	16.0	12.0	7.5	7.0	7.0	8.2			
φ8 × 7 L	24.0	12.0	11.5	8.7	8.7	7.3			
φ8 × 8 L	24.0	12.0	11.5	8.7	8.7	8.3			
φ8 × 10 L	24.0	16.0	11.5	8.7	8.7	11.0			
φ8 × 12 L	24.0	16.0	11.5	8.7	8.7	12.3			
φ10 × 8 L	24.0	16.0	11.5	10.7	10.7	8.3			
φ10 × 10 L	24.0	16.0	11.5	10.7	10.7	11.0	—	图1	ZD
φ10 × 12.7 L	24.0	16.0	11.5	10.7	10.7	12.8			
φ4 × 3 L	12.0	8.0	5.5	4.7	4.7	3.2	—	图1	ZR、ZE、ZG
φ5 × 3 L	12.0	12.0	5.5	6.0	6.0	3.2			
φ6.3 × 3 L	16.0	12.0	7.5	7.0	7.0	3.2	—	图1	ZS、ZP、ZT
φ4 × 3.9 L	12.0	8.0	5.5	4.7	4.7	4.3			
φ5 × 3.9 L	12.0	12.0	5.5	6.0	6.0	4.3	—	图1	WX、WJ、WP、WT、WZ、WF、WG、UQ
φ6.3 × 3.9 L	16.0	12.0	7.5	7.0	7.0	4.4			
φ4 × 4.5 L	12.0	8.0	5.5	4.7	4.7	4.9	—	图1	WT、WZ、UT、UP、CD、UD、WD、UR、WS、UA、UL
φ5 × 4.5 L	12.0	12.0	5.5	6.0	6.0	4.9			
φ6.3 × 4.5 L	16.0	12.0	7.5	7.0	7.0	5.0	—	图1	WT、WZ、WF、UR、WS、UX、CD、UD、WD、UB、WH、WG、UA、UL、CB、CW、CJ、UE、BC、UQ
φ3 × 5.4 L	12.0	8.0	5.5	3.6	3.6	5.8			
φ4 × 5.4 L	12.0	8.0	5.5	4.7	4.7	5.8	—	图1	WT、WZ、WF、UR、WS、UX、CD、UD、WD、UB、WH、WG、UA、UL、CB、CW、CJ、UE、BC、UQ
φ5 × 5.4 L	12.0	12.0	5.5	6.0	6.0	5.8			
φ6.3 × 5.4 L	16.0	12.0	7.5	7.0	7.0	5.8	—	图1	WT、WZ、WF、UR、WS、UX、CD、UD、WD、UB、WH、WG、UA、UL、CB、CW、CJ、UE、BC、UQ
φ8 × 5.4 L	16.0	12.0	7.5	8.7	8.7	5.8			
φ4 × 5.8 L	12.0	8.0	5.5	4.7	4.7	6.3	—	图1	WT、WZ、WF、UR、WS、UX、CD、UD、WD、UB、WH、WG、UA、UL、CB、CW、CJ、UE、BC、UQ
φ5 × 5.8 L	12.0	12.0	5.5	6.0	6.0	6.3			
φ6.3 × 5.8 L	16.0	12.0	7.5	7.0	7.0	6.3	—	图1	WT、WZ、WF、UR、WS、UX、CD、UD、WD、UB、WH、WG、UA、UL、CB、CW、CJ、UE、BC、UQ
φ4 × 7 L	12.0	8.0	5.5	4.7	4.7	7.5			
φ5 × 7 L	12.0	12.0	5.5	6.0	6.0	7.5	—	图1	WT、WZ、WF、UR、WS、UX、CD、UD、WD、UB、WH、WG、UA、UL、CB、CW、CJ、UE、BC、UQ
φ6.3 × 7 L	16.0	12.0	7.5	7.0	7.0	7.5			
φ6.3 × 7.7 L	16.0	12.0	7.5	7.0	7.0	8.0	—	图1	WT、WZ、WF、UR、WS、UX、CD、UD、WD、UB、WH、WG、UA、UL、CB、CW、CJ、UE、BC、UQ
φ6.3 × 8.7 L	16.0	12.0	7.5	7.0	7.0	9.1			
φ8 × 6.2 L	16.0	12.0	7.5	8.7	8.7	6.8	—	图1	WT、WZ、WF、UR、WS、UX、CD、UD、WD、UB、WH、WG、UA、UL、CB、CW、CJ、UE、BC、UQ
φ8 × 10 L	24.0	16.0	11.5	8.7	8.7	11.0			
φ10 × 10 L	24.0	16.0	11.5	10.7	10.7	11.0	—	图1	WT、WZ、WF、UR、WS、UX、CD、UD、WD、UB、WH、WG、UA、UL、CB、CW、CJ、UE、BC、UQ
φ12.5 × 13.5 L	32.0	24.0	14.2	14.0	14.0	14.0			
φ12.5 × 16 L	32.0	24.0	14.2	14.0	14.0	16.3	—	图1	WT、WZ、WF、UR、WS、UX、CD、UD、WD、UB、WH、WG、UA、UL、CB、CW、CJ、UE、BC、UQ
φ12.5 × 21 L	32.0	24.0	14.2	14.0	14.0	21.3			
φ16 × 16.5 L	44.0	28.0	20.2	17.5	17.5	16.8	—	图1	WT、WZ、WF、UR、WS、UX、CD、UD、WD、UB、WH、WG、UA、UL、CB、CW、CJ、UE、BC、UQ
φ16 × 21.5 L	44.0	28.0	20.2	17.5	17.5	21.8			
φ18 × 16.5 L	44.0	32.0	20.2	19.5	19.5	16.8	—	图1	WT、WZ、WF、UR、WS、UX、CD、UD、WD、UB、WH、WG、UA、UL、CB、CW、CJ、UE、BC、UQ
φ18 × 21.5 L	44.0	32.0	20.2	19.5	19.5	21.8			
φ20 × 16.5 L	44.0	36.0	20.2	21.5	21.5	17.0	—	图1	WT、WZ、WF、UR、WS、UX、CD、UD、WD、UB、WH、WG、UA、UL、CB、CW、CJ、UE、BC、UQ
φ20 × 21.5 L	44.0	36.0	20.2	21.5	21.5	22.0			

铝电解电容器 ALUMINUM ELECTROLYTIC CAPACITORS

● 卷筒



余量显示槽



导电性高分子铝固体电解电容器

φD	4	5	6.3	8	10
A	14		18		26
B	382				


铝电解电容器

φD	3、4	5	6.3	8×5.4, 8×6.2	8×7, 8×10, 10×8, 10×10	12.5	16, 18, 20
A	14	14	18	18	26	34	46
B	382	382	382	382	382	332	332

容纳数量

φD	1卷筒数量
3、4	2,000个
4×7	1,500个
5、6.3	1,000个
6.3×7.7, 6.3×8、8×8	900个
6.3×8.7	800个
8×5.4、8×6.2、8×7	1,000个
8×10、10×8、10×10	500个
8×12、10×12.7	400个
12.5×13.5	200个
12.5×16	150个
12.5×21, 16×16.5, 18×16.5	125个
20×16.5	100个
16×21.5、18×21.5	75个
20×21.5	50个

■ 芯片・托盘仕様 (适用于CD、UG、UJ、UN、UH、UE、BC系列)

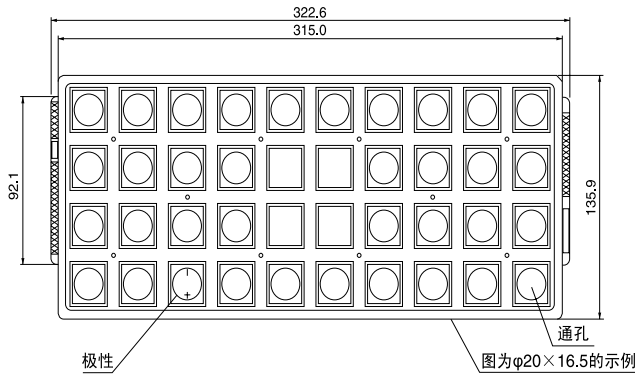

产品尺寸 φ D×L (mm)	T ₁	T ₂
12.5×13.5, 12.5×16	22	18
16×16.5, 18×16.5, 20×16.5	22.5	18.5
12.5×21	28	23
16×21.5, 18×21.5, 20×21.5	28.5	23.5

容纳数量

φD	1托盘数量
12.5	70个
16	60个
18, 20	40个